

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局



(43) 国际公布日:
2005年2月17日(17.02.2005)

PCT

(10) 国际公布号:
WO 2005/014081 A1

- (51) 国际分类⁷: A61M 1/06
- (21) 国际申请号: PCT/CN2004/000073
- (22) 国际申请日: 2004年1月20日(20.01.2004)
- (25) 申请语言: 中文
- (26) 公布语言: 中文
- (30) 优先权:
03209609.7 2003年8月8日(08.08.2003) CN
- (71) 申请人(对除美国以外的所有指定国): 宁波市科技园
区拓普健康科技有限公司(TOPPOR HEALTHTEC,
INC.) [CN/CN]; 中国浙江省宁波市科技园院士路
创业大厦3-25室, Zhejiang 315040 (CN)。
- (72) 发明人;及
- (75) 发明人/申请人(仅对美国): 费道伟(FEI, Daowei) [CN/
CN]; 中国浙江省宁波市镇海发电厂住宅3区2幢504
室, Zhejiang 315208 (CN)。
- (74) 代理人: 宁波诚源专利事务所有限公司(CHANNEL
PATENT ATTORNEYS OFFICE)中国浙江省宁波
市解放南路65号阳光大厦18-D, Zhejiang 315010
(CN)。
- (81) 指定国(除另有指明, 要求每一种可提供的国家保护):
AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW,
BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR,

HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL,
PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW

- (84) 指定国(除另有指明, 要求每一种可提供的地区保护):
ARIPO(BW, CH, GM, KE, LS, MW, MZ, SD, SL, SZ,
TZ, UG, ZM, ZW), 欧亚专利(AM, AZ, BY, KG, KZ,
MD, RU, TJ, TM), 欧洲专利(AT, BE, BG, CH, CY,
CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT,
LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI(BF, BJ,
CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE,
SN, TD, TG)

根据细则4.17的声明:

- 关于申请人在国际申请日有权申请并被授予专利(细则4.17(ii))对除美国以外的所有指定国
- 关于申请人在国际申请日有权申请并被授予专利(细则4.17(ii))对下列指定国: 美国
- 关于申请人在国际申请日有权要求该在先申请的优先权(细则4.17(iii))对除美国以外的所有指定国
- 发明人资格(细则4.17(iv))仅对美国


本国际公布:

- 包括国际检索报告。

所引用双字母代码和其它缩写符号, 请参考刊登在每期PCT公报期刊起始的“代码及缩写符号简要说明”。

(54) Title: MULTIFUNCTIONAL MAMMARY-GLAND-MERIDIAN FREQUENCY SPECTROMETER

(54) 发明名称: 多功能乳腺经络频谱仪

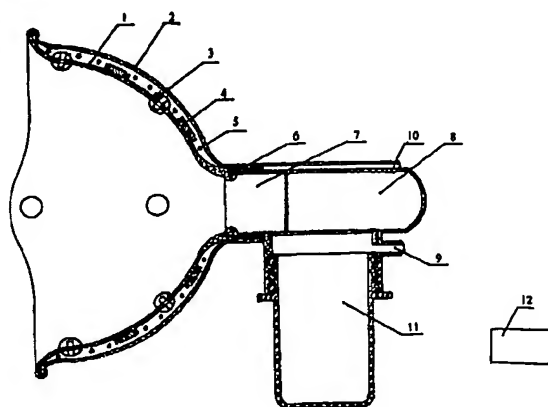

(57) Abstract: A kind of multifunctional mammary-gland-meridian frequency spectrometer, including: a whole milk bra, comprising inner and outer bras; a electric heater inserted between said inner and outer bras; permanent magnets, mounted between said inner bra and electric heater; magneto-electric poles, formed with conductive rubbers, which are embedded on the inner bra equably. An electronic impulse spectrum generator is connected to the electric heater, the permanent magnets reeled with windings and the magneto-electric poles of conductive rubbers. An electric vibrator or a suck tube connected with an electric vibrator, mounted in the center of the front of said bra. A nipple fixture is provided at the front-end of the suck tube, which are circuits of inward projections. The invention is used to apply the constant frequency spectrum electromagnetic pulse to the meridian of the breasts, to perform the heat treatment for the breast with constant temperature, to provide vibratory massage and vacuum sucking, which is effective for the precautions against mastitis, crater nipple and lobular hyperplasia, etc.

[见续页]

WO 2005/014081 A1